


# Marlow DATASHEET®

## CHAFE COVER

Our extensive range of Grand Prix Series Chafe covers come in 32 and 48 plait construction with a choice of Black or white Dyneema® for excellent abrasion resistance or Technora® for higher coefficient of friction and improved heat resistance.

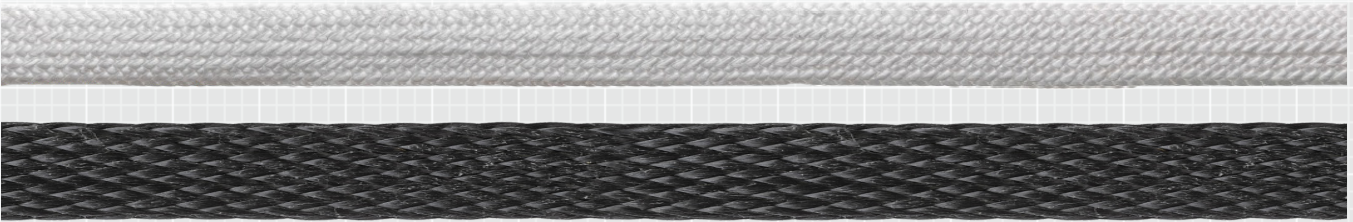

### PERFORMANCE

DIAMETER		MASS		PLAITS	MIN DIAMETER		MAX DIAMETER	
mm	Inch	g/m	lb/100 ft		mm	Inch	mm	Inch
8	5/16	15	1.01	32	4	5/32	10	13/16
10	13/16	22	1.48	32	5	3/16	14	9/16
10	13/16	20	1.34	48	6	7/32	16	5/8
12	15/32	32	2.15	48	7	1/4	18	3/4
14	9/16	42	2.82	48	9	3/8	20	13/16
16	5/8	52	3.49	48	11	7/16	24	15/16
20	13/16	72	4.83	48	14	9/16	28	1 1/8
24	15/16	94	6.30	48	15	19/32	36	1 7/16

#### Key Specifications:

<b>Material:</b>	Dyneema®SK75 (high modulus polyethylene)
<b>Construction:</b>	Hollow braided rope
<b>Coating:</b>	'Amourcoat' PU impregnation available
<b>Chemical Resistance:</b>	Excellent resistance to most chemicals

Marlow Ropes Ltd  
Ropemaker Park  
Hailsham  
East Sussex, BN27 3GU  
England  
[www.marlowropes.com](http://www.marlowropes.com)

Marlow Ropes, Inc.  
Cordage Business Park  
Plymouth  
MA 02360  
USA

UK: +44 (0) 1323 444 444  
[sales@marlowropes.com](mailto:sales@marlowropes.com)  
US: +1 508 830 444  
[salesusa@marlowropes.com](mailto:salesusa@marlowropes.com)



Disclaimer  
Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.

Certificate Number 315  
ISO 9001  
ISO 14001