


Marlow® DATASHEET

D12 99

Marlow D12 99 is a premium lightweight, high strength, low elongation "all round" rope manufactured using Dyneema® SK99, delivering very high strength, stiffness, durability and longevity.

Manufactured using a 12x1 12-strand construction and colour coated with Marlow's proprietary ArmourCoat, D12 is pre-stretched to reduce constructional stretch and bedding-in issues on first use.


D12 has a multitude of uses and applications in commercial and leisure applications from lifting and winching to lashings and purchase systems. Primarily, D12 can be seen as a credible alternative to steel wire.

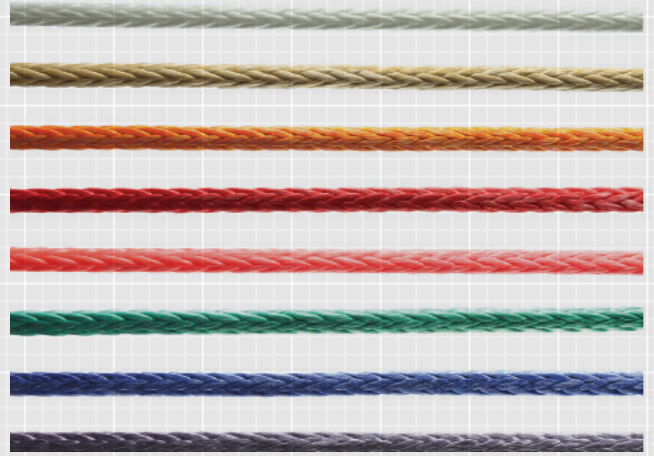

Nominal Diameter		Mass (Weight)		Minimum Linear Strength ISO 2307			Minimum Spliced Strength			Average Spliced Strength		
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN	kg	lb	kN
2.5	3/32	3.70	0.25	677	1,490	6.67	609	1,341	6.00	677	1,490	6.60
3	1/8	5.30	0.36	1,184	2,604	11.7	1,066	2,344	10.50	1,184	2,605	11.6
3.5	9/64	7.40	0.50	1,707	3,754	16.8	1,536	3,379	15.1	1,706	3,754	16.7
4	5/32	9.80	0.66	2,447	5,382	24.0	2,202	4,844	21.6	2,447	5,383	24.0
5	3/16	12.8	0.86	2,803	6,168	27.6	2,523	5,551	24.8	2,804	6,168	27.5
6	7/32	17.7	1.19	4,150	9,129	40.7	3,735	8,216	36.6	4,150	9,129	40.7
7	1/4	28.0	1.88	6,379	14,032	62.6	5,741	12,629	56.3	6,378	14,032	62.6
8	5/16	33.0	2.21	7,532	16,572	73.9	6,779	14,915	66.5	7,533	16,572	73.9
9	3/8	37.6	2.52	8,259	18,169	81.0	7,433	16,352	72.9	8,259	18,169	81.0
10	13/32	48.3	3.24	11,036	24,279	108	9,932	21,851	97.4	11,036	24,279	108
11	7/16	58.2	3.90	13,794	30,348	135	12,415	27,313	122	13,794	30,348	135
13	1/2	76.0	5.10	18,387	40,452	180	16,548	36,407	162	18,387	40,452	180
15	9/16	98.0	6.57	21,364	47,002	210	19,228	42,302	189	21,365	47,003	210
16	5/8	113	7.58	24,474	53,844	240	22,027	48,460	216	24,475	53,845	240
18	11/16	133	8.92	29,174	64,183	286	26,257	57,765	258	29,174	64,183	286
20	25/32	180	12.1	38,883	85,543	381	34,995	76,989	343	38,883	85,543	381

Ropes designed in accordance with ISO 10325:2018

Linear MBL refers to unspliced ropes determined in accordance with ISO2307:2019

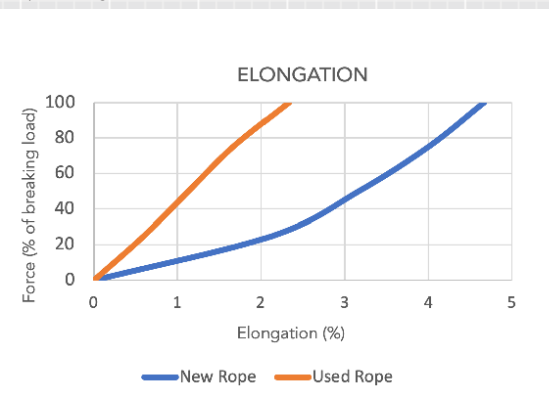

Key Specifications:

- Material:** Dyneema SK99
- Construction:** 12 x 1 single braid construction
- Coating:** Marlow ArmourCoat Polyurathane
- Relative Density:** 0.97 (floats)
- Chemical Resistance:** Excellent resistance to most chemicals
- UV Resistance:** Very good
- Melting Point:** 140°C
- Critical Temperature:** 80°C (exposure to temperatures over this will result in permanent strength loss)
- Creep:** Creep is a factor of load, temperature and time. Increasing any of these factors will increase creep.

Dyneema®	Load	Temperature	Creep Rate	Creep Lifetime
SK99	20%	16 Deg. C	1.1% / yr	10 Years

Marlow Ropes Ltd
Ropemaker Park
Hailsham
East Sussex, BN27 3GU
England

Marlow Ropes, Inc.
Cordage Business Park
Plymouth
MA 02360
USA

UK: +44 (0) 1323 444 444
sales@marlowropes.com
US: +1 508 830 444
salesusa@marlowropes.com



Certificate Number 315
ISO 9001
ISO 14001

www.marlowropes.com

Disclaimer
Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.