

Marlow

HM12+

Marlow HM12+ is a premium and versatile "all round" rope offering a lightweight, high strength and flexible alternative to steel wire and polyester ropes.


HM12+ has been designed to offer significantly improved strength, handling and service life and subsequently can provide a more cost effective solution compared to more traditional products.



Nominal Diameter		Mass (Weight)		Minimum Linear Strength ISO 2307			Minimum Spliced Strength			Grommet
mm	Inch	kg/m	lb/100 ft	kg	lb	kN	kg	lb	kN	kN
18	3/4	0.20	13	33,100	73,000	326	29,800	65,700	293	483
20	13/16	0.24	16	39,800	87,800	391	35,800	79,000	352	581
22	7/8	0.29	19	46,900	103,000	460	42,200	93,000	414	683
24	1	0.32	21	51,400	113,000	504	46,300	102,000	454	749
26	1 1/16	0.39	26	62,500	138,000	613	56,200	124,000	552	911
28	1 1/8	0.43	29	67,700	149,000	664	60,900	134,000	598	987
30	1 1/4	0.52	35	80,900	178,000	792	72,800	161,000	713	1,180
32	1 5/16	0.58	39	89,300	197,000	877	80,400	178,000	789	1,300
34	1 3/8	0.64	43	96,200	212,000	943	86,500	191,000	849	1,400
36	1 1/2	0.69	47	103,000	228,000	1,010	92,900	205,000	911	1,500
38	1 9/16	0.78	52	116,000	255,000	1,140	105,000	230,000	1,030	1,690
40	1 5/8	0.87	58	127,000	280,000	1,250	114,000	252,000	1,120	1,850
44	1 3/4	1.04	70	147,000	323,000	1,440	132,000	291,000	1,290	2,130
48	2	1.22	82	169,000	374,000	1,660	152,000	336,000	1,490	2,460
52	2 1/8	1.48	99	204,000	449,000	2,000	183,000	404,000	1,800	2,960
56	2 1/4	1.65	111	226,000	497,000	2,220	203,000	447,000	2,000	3,290
60	2 1/2	1.91	128	257,000	566,000	2,520	231,000	509,000	2,270	3,750
64	2 5/8	2.17	145	287,000	633,000	2,820	258,000	570,000	2,540	4,190
68	2 11/16	2.43	163	318,000	701,000	3,110	286,000	631,000	2,800	4,620
72	2 13/16	2.78	186	361,000	795,000	3,540	325,000	715,000	3,180	5,250
76	3 1/8	3.04	204	392,000	863,000	3,840	352,000	777,000	3,460	5,710
80	3 3/16	3.39	227	435,000	958,000	4,260	391,000	863,000	3,840	6,330

Ropes designed in accordance with ISO 10325:2018

Linear MBL refers to unspliced ropes determined in accordance with ISO2307:2019

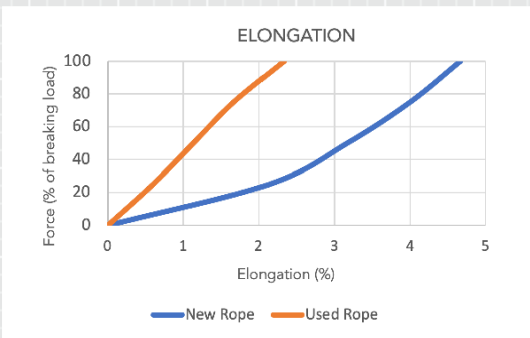

Key Specifications:

- Material:** HMPE (High Modulus Polyethylene)
- Construction:** 12 x 1 single braid construction
- Coating:** Marlow ArmourCoat Polyurathane
- Relative Density:** 0.97 (floats)
- Chemical Resistance:** Excellent resistance to most chemicals
- UV Resistance:** Very good
- Melting Point:** 140°C
- Critical Temperature:** 80°C (exposure to temperatures over this will result in permanent strength loss)

Marlow Ropes Ltd
Ropemaker Park
Hailsham
East Sussex, BN27 3GU
England

Marlow Ropes, Inc.
Cordage Business Park
Plymouth
MA 02360
USA

UK: +44 (0) 1323 444 444
sales@marlowropes.com
US: +1 508 830 444
salesusa@marlowropes.com



Certificate Number 315
ISO 9001
ISO 14001

www.marlowropes.com

Disclaimer
Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.