

# Marlow <sup>DATASHEET</sup>®

## HMPE TOW ROPE

Light weight and strong, HMPE Tow Ropes have been designed specifically for towing medium weight, front line armoured vehicles.


Safer and lighter than wire, these 24 Plait HMPE cover/12 strand HMPE construction tow ropes can be quickly and easily deployed in critical situations by a single person.



ROPE DIAMETER		WEIGHT		LENGTH		EYE SIZE		MIN SPLICED STRENGTH	
mm	Inch	kg	lb	metres	feet	metres	feet	kg	lb
50	2.0	7.8	17.2	4.8	15.7	0.25	0.8	40,000	88,000

Ropes designed in accordance with ISO 10325:2018

Linear MBL refers to unspliced ropes determined in accordance with ISO2307:2019

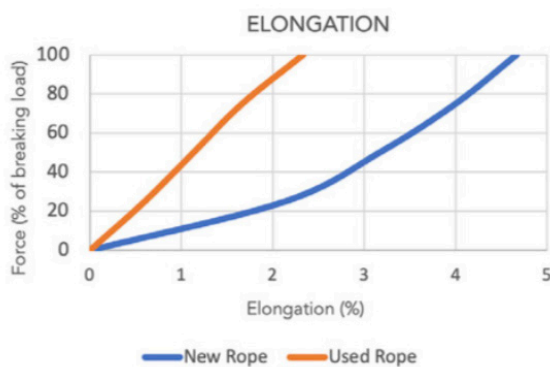

### Key Specifications:

<b>Material:</b>	HMPE (High Modulus Polyethylene)
<b>Construction:</b>	12 strand braided core with 24 plait braided
<b>Coating:</b>	Polyurathane coated cover
<b>UV Resistance:</b>	Durable
<b>NSN:</b>	4020-99-599-0610

Marlow Ropes Ltd  
Ropemaker Park  
Hailsham  
East Sussex, BN27 3GU  
England

Marlow Ropes, Inc.  
Cordage Business Park  
Plymouth  
MA 02360  
USA

UK: +44 (0) 1323 444 444  
sales@marlowropes.com  
US: +1 508 830 444  
salesusa@marlowropes.com



Certificate Number 315  
ISO 9001  
ISO 14001

[www.marlowropes.com](http://www.marlowropes.com)

**Disclaimer**

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.