


# Marlow DATASHEET<sup>®</sup>

## DOUBLEBRAID

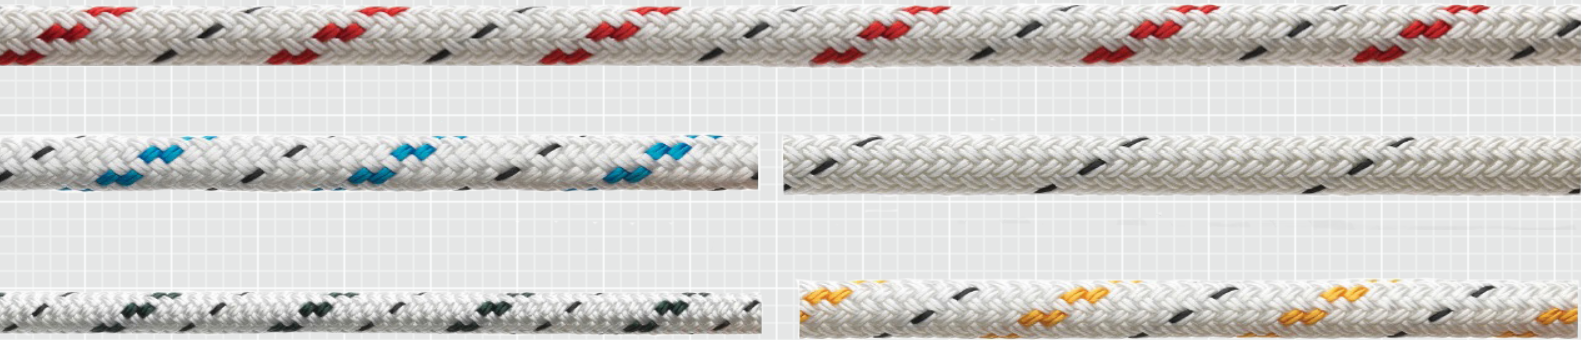

### CONSTRUCTION

**MATERIAL CORE:**

High Tenacity Polyester

**MATERIAL COVER:**

High Tenacity Polyester

**CORE CONSTRUCTION:**

12 strand braided

**COVER CONSTRUCTION:**

24 plait braided

### PROPERTIES

**DOUBLEBRAID CONSTRUCTION:**

Flexible and easily spliced

**HEAT SET:**

Excellent stability improves 'feel' and spliceability

**HIGH STRENGTH:**

Good general purpose line

### PERFORMANCE

DIAMETER		CIRCUMFERENCE		MASS		AVERAGE STRENGTH			MIN STRENGTH		
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN		
6	7/32	28.4	1.90	1390	3058	13.6	1280	2820	12.5		
8	5/16	48	3.22	2560	5632	25.1	2360	5190	23.1		
10	3/8	74.7	5.01	3690	8118	36.2	3390	7480	33.3		
12	1/2	111	7.44	4760	10472	46.7	4380	9650	43.0		
14	9/16	155.5	10.43	6050	13310	59.4	5570	12300	54.6		
16	5/8	193	12.94	7230	15906	70.9	6650	14700	65.3		
18	3/4	231.7	15.54	7910	17402	77.6	7280	16000	71.4		
20	13/16	328	22.0	10950	24140	107.4	9860	21737	96.7		

Marlow Ropes Ltd  
Ropemaker Park  
Hailsham  
East Sussex, BN27 3GU  
England

Marlow Ropes, Inc.  
Cordage Business Park  
Plymouth  
MA 02360  
USA

www.marlowropes.com  
UK: +44 (0) 1323 444 444  
sales@marlowropes.com  
US: +1 508 830 444  
salesusa@marlowropes.com

#### Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied.

Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose.

Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines.

Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.

MA-DA-041 | ISSUE NO.2



Certification Number 315

ISO 9001