


# Marlow<sup>®</sup> DATASHEET

## POLYESTER S.P.I.E ROPE

Marlow's new extraction system has been designed for the transportation of a larger number of personnel with increased safety.

- Higher strength to accommodate greater number of personnel (10 to 12 as standard)
- 2 loop colour coded integrated safety system for all personnel
- 1 (yellow loop) for easy retrieval
- Spliced eye termination.

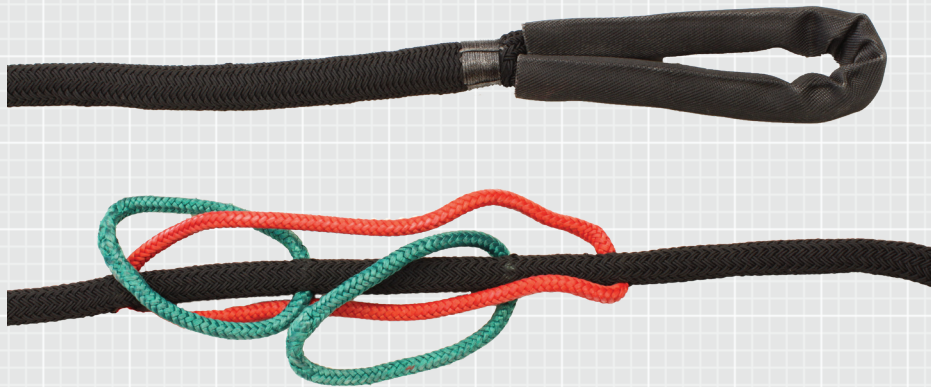

### APPLICATIONS

Standard length 40m. Personnel insertion and extraction

### MATERIAL

#### MAIN ROPE:

Manufactured from Polyester

Unaffected by water

Zero shrinkage

High Elongation (Low shock loads)

#### PERSONNEL LOOPS:

Manufactured from UHMPE (Ultra High Modulus Polyethylene)

Very light weight - more than 8x lighter than steel wire for a given weight

High strength - 80% stronger than steel wire for a given weight

Low stretch - see table below

Good resistance to chemicals and UV

Zero water shrinkage

### CONSTRUCTION

#### TWISTED FIBRE CONSTRUCTION:

#### 12 STRAND BRAIDED PES CORE CONSTRUCTION:

#### 24 PLAIT OPTI-TWIST PES COVER CONSTRUCTION:

Improved abrasion resistance

Firmer rounder rope, aids handling

Flexible product and easily handled

Torque balanced

Improved abrasion resistance

Increased elongation (Low shock loads)

## PROPERTIES

RELATIVE DENSITY:	1.38
CHEMICAL RESISTANCE:	Excellent resistance to most chemicals (additional information available on request)
UV RESISTANCE:	Excellent
MELTING POINT:	140°C
CRITICAL TEMPERATURE:	80°C (exposure to temperatures over this will result in permanent strength loss)

## TERMINATIONS

SPLICED EYE TERMINATION:	Soft eye splice as standard
--------------------------	-----------------------------

## PERFORMANCE

### MAIN ROPE:

DIAMETER		CIRCUMFERENCE		MASS		AVERAGE STRENGTH			MIN STRENGTH	
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN	
28	1 7/64	558	37.42	15543	34195	152.5	14300	31460	140.3	

### PERSONNEL & SAFETY LOOPS:

DIAMETER		CIRCUMFERENCE		MASS		AVERAGE STRENGTH			MIN STRENGTH	
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN	
10	13/32	48.6	3.26	3860	8492	37.9	5630	12386	55.2	

Marlow Ropes Ltd  
Ropemaker Park  
Hailsham  
East Sussex, BN27 3GU  
England

[www.marlowropes.com](http://www.marlowropes.com)

Marlow Ropes, Inc.  
Cordage Business Park  
Plymouth  
MA 02360  
USA

UK: +44 (0) 1323 444 444  
[sales@marlowropes.com](mailto:sales@marlowropes.com)  
US: +1 508 830 444  
[salesusa@marlowropes.com](mailto:salesusa@marlowropes.com)



Certificate Number 315  
ISO 9001  
ISO 14001

#### Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied.  
Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose.  
Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines.  
Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.