


Marlow

DATASHEET [®]

EXCEL RACING

High strength, lightweight with 100% Polyester cover and Dyneema® core for all round use on halyards, sheets and control lines. Easily tapered and holds well in cleats Excel Racing is a great all round rope ideal for stripped halyards and spin sheets due to its easily identifiable solid colour cover and colour matched ArmourCoat core. Great all round performance.

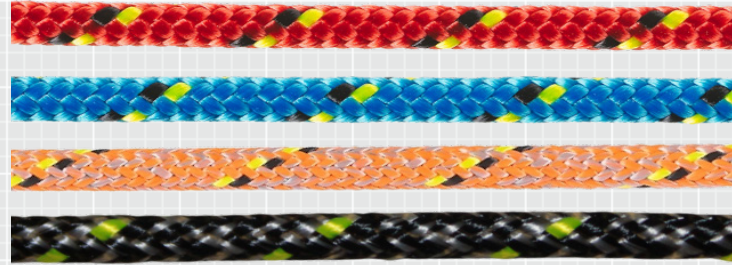

Key Specifications:

Material:	D12 Core, High Tenacity Polyester
Construction:	12 strand braided (4,5,6mm) core and 16 plait braided cover
Properties:	Doublebraid construction Heat Set Core High Strength

N.B. KNOTS WILL SIGNIFICANTLY REDUCE THE STRENGTH OF ANY ROPE. THIS PRODUCT WILL TYPICALLY RETAIN APPROXIMATELY 40% OF ITS STRENGTH IF TERMINATED WITH A KNOT. THE EXACT FIGURE WILL DEPEND ON THE TYPE OF KNOT USED AND OTHER FACTORS.

PERFORMANCE

DIAMETER		MASS		AVERAGE STRENGTH			MIN STRENGTH		
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN
1.5	1/16	1.7	0.11	139	306	1.36	125	276	1.23
2	3/32	2.9	0.19	224	494	2.20	202	444	1.98
3	1/8	5.8	0.39	463	1020	4.54	417	919	4.09
4	5/32	12.4	0.83	995	2190	9.76	855	1880	8.39
5	3/16	18.4	1.23	1430	3160	14.1	1070	2360	10.5
6	7/32	24.1	1.62	2060	4530	20.2	1850	4080	18.1

Marlow Ropes Ltd
Ropemaker Park
Hailsham
East Sussex, BN27 3GU
England
www.marlowropes.com

Marlow Ropes, Inc.
Cordage Business Park
Plymouth
MA 02360
USA

UK: +44 (0) 1323 444 444
sales@marlowropes.com
US: +1 508 830 444
salesusa@marlowropes.com



Disclaimer
Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.

Certificate Number 315
ISO 9001
ISO 14001